TapTech Pro® Series

UltraFiltration Faucet Filter





TapTech Pro® Series is an advanced tiltration system adaptor that seamlessly integrates with your existing faucet. It incorporates a state-of-the-art filter to shield against waterborne pathogens like Legionella, NTM (Non-tuberculous mycobacteria), E. Coli, Salmonella, Pseudomonas, and more. Provide the highest level of protection against waterborne bacteria, with a pore size of 0.08μm, fully compliant with U.S. FDA, USP, and EMA standards for sterile filtered water and certified with ASTM F838-2015ae for Legionella reduction (Log 8)

Each filter provides up to 8,000 liters (2,113 gallons) of safe, pure water for a period of up to 180 days, depending on the initial water quality*.



Enhanced by our innovative membrane technology, these systems are distinguished by their extended durability. The filter component is designed for easy, secure replacement, providing unrivaled safety.

Each TapTech Pro Series is equipped with our exclusive Bacteria–Free (Legionella) filter, designed for a perfect fit within the faucet. This unique setup ensures the filter housing creates a leak–proof seal with the handle, maximizing protection and efficiency.

^{*}Capacity depends on local water conditions, the amount of microparticles (SDI), and pre-filtration. SDI is measured according to ASTM D4189-95. It is recommended that the filter cartridge be replaced after 4 months. The amount of impurities in the water will vary between water systems, so filters will become clogged at different rates.



FEATURES

BENEFITS

- 0.08 µm sterilizing grade hollow fiber membranes
- Reusable Anti-Microbial Head

 exchangeable with Filter Cartridge
- Compatible with ADA compliant pause adapter
- Robust pre-filtration cartridge
- Tested and complies with P376 +
- ASTM F838-2015ae1 + ASSE LEC 2011-2022 Legionella reduction standards
- in Compliance with EPA WaterSense & ASTM F838-2020

- Highest healthcare safety standards with NSF P376 Certification
- Retains microorganisms without volume restriction
- Waste reduction, cost reduction with high performance
- Complete Anti-Microbial
 protection embedded throughout the system
- Integrates with Legionella Water Management Plans

International standard & reliability tests

Our products are subject to stringent testing processes to align with global standards. Right from the development stage of our water purifiers and filters, we prioritize durability, safety, performance, and functionality.

This commitment is demonstrated through comprehensive reliability testing that conforms to international stress test standards, ensuring our products meet the highest quality criteria.











Instruction For Use (IFU):



Redefining Water Purity



PRODUCT DETAILS

Mentor Water Technology Products are designed with a proactive approach, aiming to achieve an unparalleled standard in water purification. The unique pore size of 0.08 microns prevents any organisms larger than 0.08 microns from passing through the membrane.

Using medical-grade ABS in combination with Biomaster material prevents any bacteria or viruses from multiplying, growing, or existing in and on the product.

Thanks to our new membrane technology, they boast a longer lifespan. The filter can be safely replaced, ensuring 100% security. Unlike similar handheld showers with exchangeable filters, where contaminated water may flow through the filter, our design prevents this by mounting the membranes directly into the handle.

This innovative method ensures the provision of **8,000** liters (**2,113 gallons**) of safe and pure drinking water, contingent upon the original water quality.





This product is treated with Biomaster silver biocide tested ISO 22196:2011

Is the additive effective against antibiotic-resistant bacteria?

Yes, Biomaster has been proven effective against antibiotic-resistant bacteria, including resistant Staphylococcus aureus (MRSA) and Vancomycin-resistant Enterococcus (VRE).





Redefining Water Purity

Biomaster binds to the cell wall disrupting growth



Biomaster ions
interferes with
the enzyme production
stopping the cell
producing energy

Biomaster intrerrupts
the cell's DNA
preventing replication



- Inhibits growth of microbes by up to 99.99%
- **Reduces** the risk of cross-contamination
- Protection that lasts for the lifetime of the product
- **FDA & EPA** approval



TECHNICAL CHARACTERISTICS



Sterilization and Quality Assurance

Utilizing (by request) filter materials that have been sterilized and rigorously tested in accordance with the standards set forth by ISO 9001:2008.

Additionally, our products are certified as CE Marked medical devices under EN ISO 13485:2003 & ISO 11137 – 1:2006, ensuring the highest level of quality and safety.



The TapTech Pro® Series offers two models:

- 1. TapTech Pro® Short (22mm)
 Material Brass & Medical ABS
- 2. TapTech Pro® Long(24mm)

 Material Brass & Medical ABS



Comprehensive Testing

Each product undergoes 100% testing for membrane integrity and leak tightness, affirming our commitment to reliability and performance.



Durability

Demonstrated physical resilience against temperature fluctuations and chlorine exposure, with a proven performance lifespan of 8,000 liters (2,113 gallons) up to 180 days, depending on the quality of the source water.





Filtration Capacity

A substantial filtration area of 3,400cm² / 527in² (Hollow Fiber) is designed for maximum efficiency and effectiveness in water purification.



Safety and Compliance

Adherence to CE-marked Class 2 standards, underscoring our dedication to safety and regulatory compliance.

- NSF P376 Bactria and fungus reduction
- ASSE LEC 2011 2022 U.S Water Engineering Association for Bacteria reduction
- ASTM F838-2015ae Legionella reduction Log 8
- Complies with EPA WaterSense & ASTM F838-20



Transparency and Trust

A complete dossier of tests, including comprehensive analyses on Legionella, is readily available, providing transparency and building trust with our clients.




Achieves a Log 8 – 99.99999% reduction rate in waterborne contaminants, showcasing the exceptional effectiveness of our technology in purifying water to the highest possible standards.

P376 MICROBIOLOGICAL FILTRATION REQUIREMENTS FOR CHALLENGE ORGANISMS & REDUCTION REQUIREMENTS

ORGANISM	Maximum influent concentration (cfu/L)	Minimum required required (%)
Legionella pneumophila ATCC 33152	1 x 10 ¹¹	99.9999 (6.0 log)
Brevundimonas diminuta ATCC 19146	1 x 10 ¹¹	99.9999 (6.0 log)
Pseudomonas aeruginosa ATCC 13388		99.9999 (6.0 log)
Aspergillus fumigatus ATCC 10894	1 x 10 °	99.99 (4.0 log)

Filtration Spectrum:

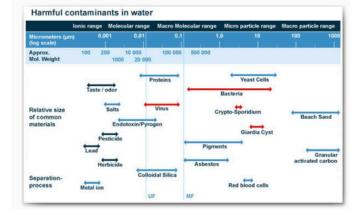





ABOUT US

Redefining Water Purity





As a proud member of Mentor Capital Holdings BV, we believe in nurturing relationships through a personal touch, embodied by our employees and distributors worldwide. At Mentor Water Technologies, we provide not only the finest purification solutions unparalleled service to meet your needs.





Patented Technology

Harnessing exclusive innovations for superior performance



R&D and Innovative **Solutions**

We leverage science to develop unique water purification solutions.



Price Affordability

Creatives that you will promote to the target market.



Simple Setup

Designed for easy installation, requiring no special tools, just simple fitting.



Certified & tested Equipment

Our equipment is certified at the highest standards through rigorous third-party testing.